


CM LODESTAR ELECTRIC CHAIN HOISTS



TECHNICAL DATA

Model	Operating voltage	Capacity (WLL) kg	Falls of load chain	Lifting speed(s) m/min	Load chain depth x pitch mm	Hoist motor kW
C	230v or 110v 1ph 50Hz	250	1	8	6.3 x 18.9	0.37
F	230v or 110v 1ph 50Hz	500	1	4	6.3 x 18.9	0.37
J	230v or 110v 1ph 50Hz	500	1	8	7.9 x 21.7	0.75
L	230v or 110v 1ph 50Hz	1000	1	4	7.9 x 21.7	0.75
LL	400v 3ph 50Hz	1000	1	8	7.9 x 21.7	0.75
LL2	400v 3ph 50Hz	1000	1	8/2.5	7.9 x 21.7	0.75
R	230v or 110v 1ph 50Hz	2000	2	2	7.9 x 21.7	0.75
RR	400v 3ph 50Hz	2000	2	4	7.9 x 21.7	0.75
RR2	400v 3ph 50Hz	2000	2	4/1.3	7.9 x 21.7	0.75
RT	230v or 110v 1ph 50Hz	3000	3	1.33	7.9 x 21.7	0.75

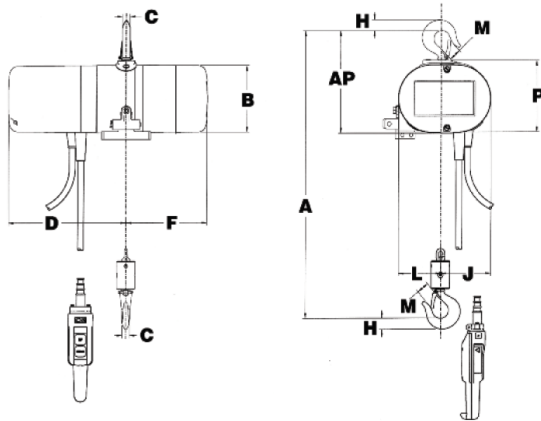

DIMENSIONS FOR HOOK SUSPENSION HOISTS

Model	Lodestar 250 / 500	Lodestar 500 / 1000	Lodestar 2000	Lodestar 3000
Frame type	A, B, C, F and AA	J, L, JJ and LL	R, RR	RT
A, mm	413	471	613	750
B, mm	156	194	194	194
C, mm	17	22	28	28
D, mm	279	241	241	241
F, mm	197	271	271	271
H, mm	25	30	38	38
J, mm	100	138	165	165
L, mm	122	184	157	157
M, mm	25	28	33	33
P, mm	168	198	198	198
AP, mm	235	271	284	319